



Ball-Wedge Bonder 5810

Bond System

Wire types	Gold wire 17,5-50µm on 2" spool
Bondhead	Ball-Wedge for gold wire Standard capillaries 16mm length (optionally 19 mm)
Ultrasonic System	F&S Generator 68 kHz (optional 106, 120, 140 kHz)

Bonder Base

Axes

- Working area X/Y-axis 200 x 150 mm;
- Programmable step resolution 1µm
- Programmable Z axis with 100 mm stroke;

Hardware

- Dual-Core PC with Windows 7 OS, Ethernet,
- USB 2.0/3.0, Colour Display 22"
- GigE-CCD-Colour Camera, 5 Mpixel
- Fully networkable in TCP/IP servers

Software

- From single bonds up to complex programmes,
- Loop shapes can be saved in libraries
- Optional pattern recognition

Control

- high-performance embedded ARM-System with Real-time operating system for precision
- 1 wire / second

Placement accuracy: +/- 5µm @ 3 sigma, incl. Tool / no wire on F & S Bondtec standard substrate

Repeatability: +/- 3 µm @ 3 sigma, incl. Tool / without wire on F & S Bondtec standard substrate

Loop height accuracy: +/- 5µm @ 3 sigma, for thin wire 5830 with 25µm aluminum wire on F & S Bondtec standard substrate

The 58xx series:

The Gold wire Ball-Wedge version of the automatic wire bonders in our Series 58xx featuring exchange able bond heads.

A fully automatic mode makes it ideally suited for medium-scale production. Parts to be bonded are fed manually by the operator, but the bonds are produced completely without operator influence.

Thanks to the built-in pattern recognition. Single bonds can be made within seconds, making the machine perfect for R&D, Pilot manufacturing and middle volume production.

BONDING THE STARS




Dimensions W x D x H 92x71x65 cm, weight approx. 80 kg

Connections 100-240 VAC, 1 Phase, 50/60 Hz, max 230 VA
Ø 6 mm standard vacuum tubing

Heater controller integrated in the machine 0-250°C

Workholder

Standard-Workholder
for parts up to 8x6"
with Vacuum und mechanical clamping

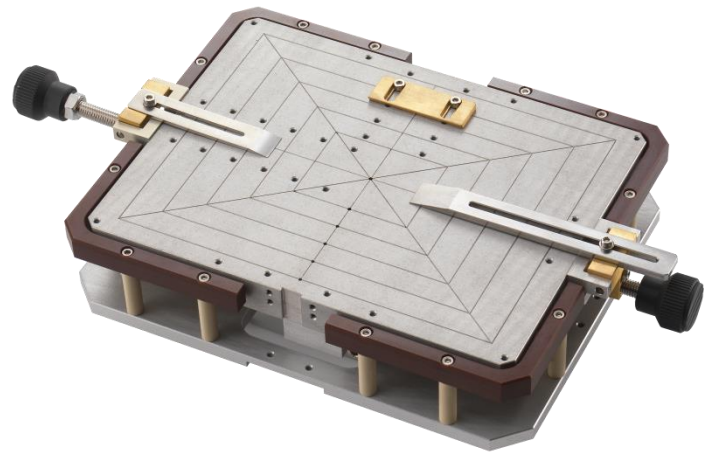


Optional:



6x6" workholder with Vacuum and mechanical clamping



TO Workholder with mechanical clamping

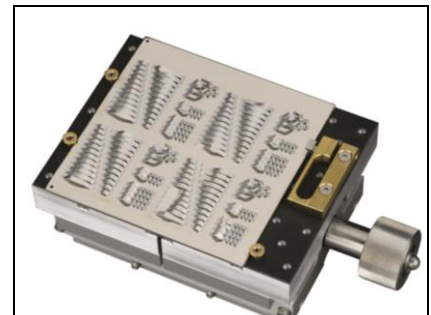

4x4" workholder with rubberized surface and mechanical clamping

F&S Bondtec Semiconductor GmbH

Industriezeile 49a

A-5280 Braunau am Inn

Tel.: +43-7722-67052-8270

Fax: +43-7722-67052-8272

Mail: info@fsbondtec.at

Web: www.fsbondtec.at



Ihr Vertriebspartner/ Votre représentant:

Hilpert electronics AG

Täferenstrasse 29

5405 Baden-Dättwil

Schweiz / Suisse

Tel: +41 56 483 25 25

Fax: +41 56 483 25 20

Mail: office@hilpert.ch

Web: www.hilpert.ch

